




— MODEL — **136-01**

Solenoid Control Valve

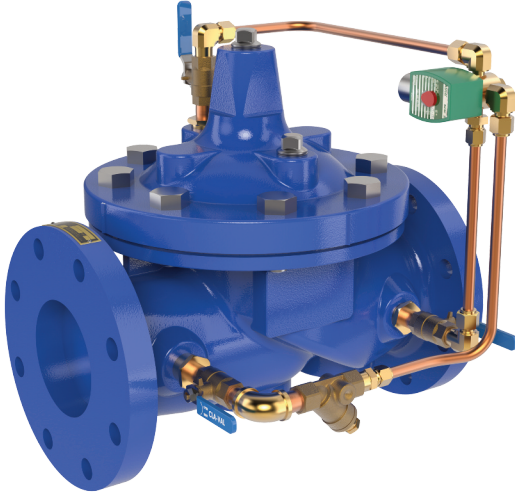

- **Fast Acting Solenoid Control**
- **Reliable, Drip-Tight Shut-Off**
- **Simple Design, Proven Reliable**
- **Optional Check Feature**
- **Easy Installation and Maintenance**

The Cla-Val Model 136-01 Solenoid Control Valve is an on-off control valve that either opens or closes upon receiving an electrical signal to the solenoid pilot control. This valve consists of a Hytrol main valve and a three-way solenoid valve that alternately applies pressure to or relieves pressure from the diaphragm chamber of the main valve. It is furnished either normally open (de-energized solenoid to open) or normally closed (energized solenoid to open).


If the check feature option is added and a pressure reversal occurs, the downstream pressure is admitted into the main valve cover chamber and the valve closes to prevent return flow.

Schematic Diagram


Item	Description
1	100-01 Hytrol Main Valve
2	CS3 Solenoid Control

Optional Features


Item	Description
A	X46A Flow Clean Strainer
B	CK2 Isolation Valve
C	CNA Closing Speed Control
D	Check Valves with Isolation Valve
P	X141 Pressure Gauge
S	CNA Needle Valve (Opening)
V	X101 Valve Position Indicator
Y	X43 "Y" Strainer
KC	Epoxy Coated

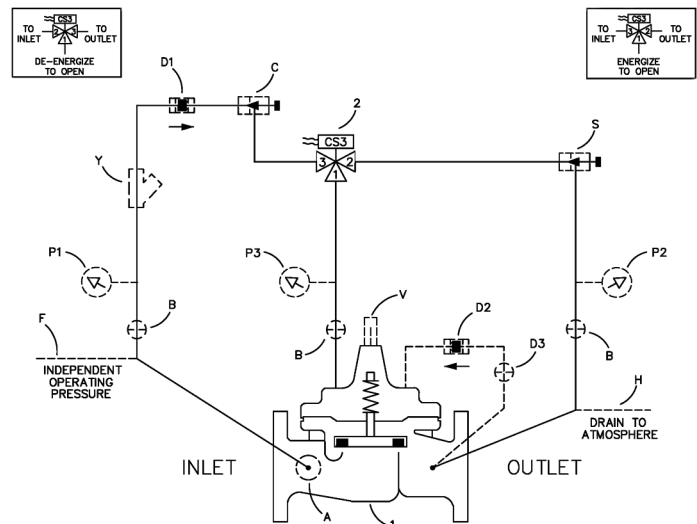

Typical Applications

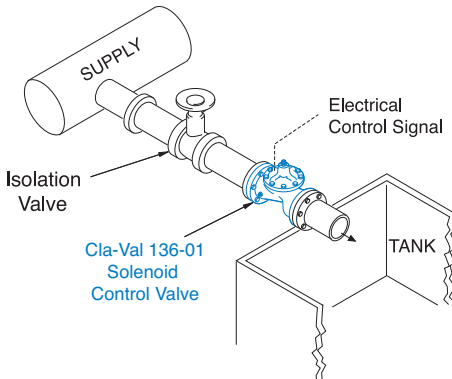

Industrial uses for the solenoid control valve are many and include accurate control of process water for batching, mixing, washing, blending or other on-off type uses.

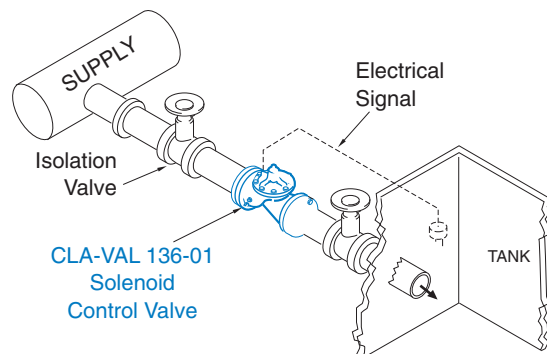

Liquid level control can be provided by using a float switch or electrode probe which sends an electrical signal to open or close the valve as needed.

Model 136-01 (Uses Hytrol Main Valve Model 100-01)

Pressure Ratings (Recommended Maximum Pressure - psi)




Valve Body & Cover		Pressure Class				
		Flanged			Grooved	Threaded
Grade	Material	ANSI Standards*	150 Class	300 Class	300 Class	End† Details
ASTM A536	Ductile Iron	B16.42	250	400	400	400
ASTM A216-WCB	Cast Steel	B16.5	285	400	400	400
UNS 87850	Bronze	B16.24	225	400	400	400

Note: * ANSI standards are for flange dimensions only.
 Flanged valves are available faced but not drilled.
 † End Details machined to ANSI B2.1 specifications.
Valves for higher pressure are available; consult factory for details

Materials

Component	Standard Material Combinations		
Body & Cover	Ductile Iron	Cast Steel	Bronze
Available Sizes	1/2" - 4" 15 - 100mm	1/2" - 4" 15 - 100mm	1/2" - 4" 15 - 100mm
Disc Retainer & Diaphragm Washer	Cast Iron	Cast Steel	Bronze
Trim: Disc Guide, Seat & Cover Bearing	Bronze is Standard Stainless Steel is Optional		
Disc	Buna-N® Rubber		
Diaphragm	Nylon Reinforced Buna-N® Rubber		
Stem, Nut & Spring	Stainless Steel		

For material options not listed, consult factory.
 Cla-Val manufactures valves in more than 50 different alloys.

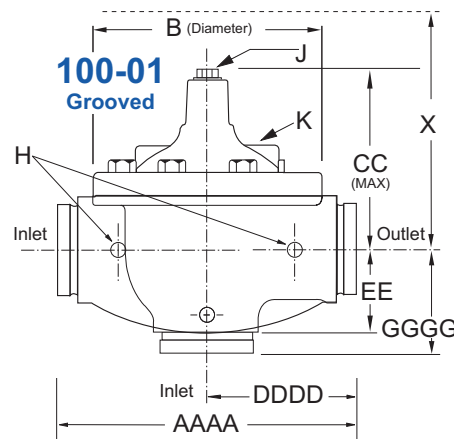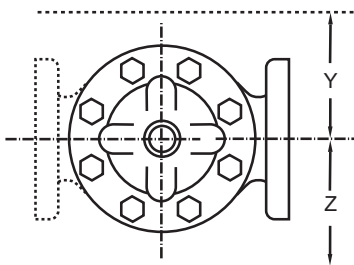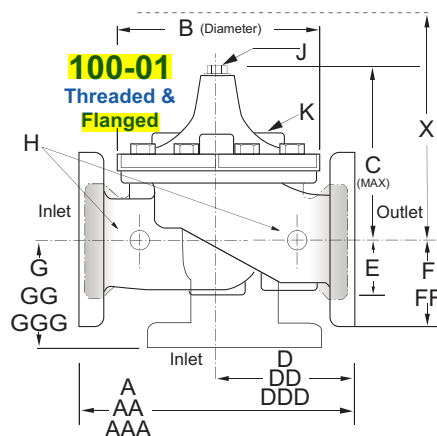

Model 136-01 Dimensions (inches)

Valve Size (Inches)	1/2*	3/4*	1*	1	1 1/4	1 1/2	2	2 1/2	3	4
A Threaded	3.50	3.50	5.12	7.25	7.25	7.25	9.38	11.00	12.50	—
AA 150 ANSI	—	—	—	—	—	8.50	9.38	11.00	12.00	15.00
AAA 300 ANSI	—	—	—	—	—	9.00	10.00	11.62	13.25	15.62
AAAA Grooved End	—	—	—	—	—	8.50	9.00	11.00	12.50	15.00
B Diameter	3.12	3.12	4.38	5.62	5.62	5.62	6.62	8.00	9.12	11.50
C Maximum	5.88	5.88	6.25	5.50	5.50	5.50	6.50	7.56	8.19	10.62
CC Maximum Grooved End	—	—	—	—	—	4.75	5.75	6.88	7.25	9.31
D Threaded	—	—	—	3.25	3.25	3.25	4.75	5.50	6.25	—
DD 150 ANSI	—	—	—	—	—	4.00	4.75	5.50	6.00	7.50
DDD 300 ANSI	—	—	—	—	—	4.25	5.00	5.88	6.38	7.88
DDDD Grooved End	—	—	—	—	—	—	4.75	—	6.00	7.50
E	0.88	0.88	1.63	1.12	1.12	1.12	1.50	1.69	2.06	3.19
EE Grooved End	—	—	—	—	—	2.00	2.50	2.88	3.12	4.25
F 150 ANSI	—	—	—	—	—	2.50	3.00	3.50	3.75	4.50
FF 300 ANSI	—	—	—	—	—	3.06	3.25	3.75	4.13	5.00
G Threaded	—	—	—	1.88	1.88	1.88	3.25	4.00	4.50	—
GG 150 ANSI	—	—	—	—	—	4.00	3.25	4.00	4.00	5.00
GGG 300 ANSI	—	—	—	—	—	4.25	3.50	4.31	4.38	5.31
GGGG Grooved End	—	—	—	—	—	—	3.25	—	4.25	5.00
H NPT Body Tapping	0.125	0.125	0.25	0.375	0.375	0.375	0.375	0.50	0.50	0.75
J NPT Cover Center Plug	0.125	0.125	0.25	0.25	0.25	0.25	0.50	0.50	0.50	0.75
K NPT Cover Tapping	0.125	0.125	0.25	0.375	0.375	0.375	0.375	0.50	0.50	0.75
Stem Travel	—	—	—	0.40	0.40	0.40	0.60	0.70	0.80	1.10
Approx. Ship Weight (lbs)	3	8	8	15	15	15	35	50	70	140
Approx. X Pilot System	—	—	—	11	11	11	13	14	15	17
Approx. Y Pilot System	—	—	—	9	9	9	9	10	11	12
Approx. Z Pilot System	—	—	—	9	9	9	9	10	11	12

* Non Guided Stem Auxillary Hytrol Controls

136-01 Valve Selection	100-01 Pattern: Globe (G), Angle (A), End Connections: Threaded (T), Grooved (GR), Flanged (F) Indicate Available Sizes									
	Inches	½	¾	1	1¼	1½	2	2½	3	4
	mm	15	20	25	32	40	50	65	80	100
Main Valve 100-01	Pattern	G	G	G, A	G, A	G, A	G, A	G, A	G, A	G, A
	End Detail	T	T	T	T	T, F, Gr*	T, F, Gr	T, F, Gr*	T, F, Gr	F, Gr
Suggested Flow (gpm)	Maximum	19	33	55	93	125	210	300	460	800
	Maximum Intermittent	24	42	68	120	160	260	370	580	990
Suggested Flow (Liters/Sec)	Maximum	1.2	2.1	3.5	6	8	13	19	29	50
	Maximum Intermittent	1.5	2.6	4.3	7.6	10	16	23	37	62
100-01 Series is the full internal port Hytrol.										*Globe Grooved Only

Pilot System Specifications

Temperature Range

Water: to 180°F/82°C

Fluids

Air, water, light oils

Solenoid Control

Body:

Brass ASTM B283

Rubber Parts:

Buna-N® Rubber Synthetic Rubber

Enclosure:

NEMA Type 1,2,3,3S,4,4X general purpose watertight*

NEMA Type 6,6P,7,9 Watertight Explosion Proof available.

Voltages:

110, 220 -50Hz AC

24, 120, 240, 480 - 60Hz AC

6, 12, 24, 120, 240 - DC

Others available at additional cost

Max. operating pressure differential:

200 psi*

Coil:

Insulation molded Class F

Watts AC 6

AC Volt Amps Inrush 30

AC Volt Amps Holding 16

Watts DC 10.6

Manual operator available at additional cost.

*Supplied unless otherwise specified

Note: Flowing Pressure Differential: 5 psi minimum

When Ordering, Specify

1. Catalog No. 136-01
2. Valve Size
3. Pattern - **Globe** or Angle
4. Pressure Class
5. **Threaded** or Flanged
6. Materials Desired
7. **Energized** or de-energized to open Main Valve
8. Solenoid Enclosure, Voltage & Hertz, Coil Insulation, and Max. Operating Pressure Differential
9. Desired Options
10. When Vertically Installed

Valve Options

X141 Pressure Gauge



X101AR Valve Position Indicator with Air Release



X101 Valve Position Indicator



X144 e-FlowMeter



X43H Strainer



Stainless Steel Pilot

